


E8000 400V 50HZ

ENERGY AT FAIR PRICE

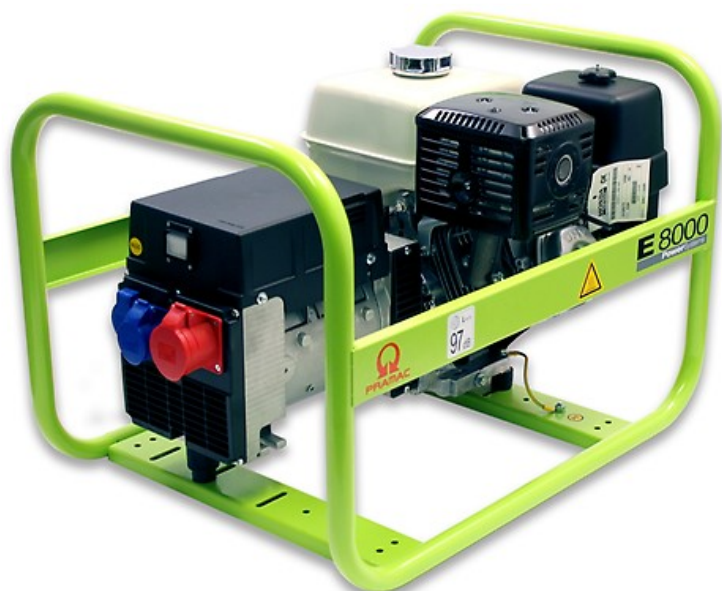

Simple professional generator. Pramac has designed this generator to ensure a high performance level at attractive price. Powerful and strong generator; easy to maintain, it will be soon essential to all your activities.

Main Features

Frequency	Hz	50
Voltage	V	400
Power factor	cos ϕ	0.8
Phase		3

Power Rating

Standby power LTP	kVA	8.3
Standby power LTP	kW	6.6
Continuous power COP	kVA	7.0
Continuous power COP	kW	5.6

Single Phase Power Rating

Single phase standby power LTP	kVA	4.0
Single phase continuous power COP	kVA	3.7

Ratings definition (According to standard ISO8528 1:2005)

Engine specifications

Engine manufacturer		Honda
Model		GX390 Recoil
Engine cooling system		Air
Displacement	cm ³	389
Aspiration		Natural
Operating Speed-Nominal	rpm	3000
Speed governor		Mechanical
Fuel		Petrol
Oil capacity	l	1.1
Starting system		Recoil



Alternator Specifications

Type		Brushes
Class		H
IP protection		23
Poles		2
Frequency	Hz	50
Voltage tolerance	%	6
Voltage regulation system		Compound

Dimensional data

Length	(L) mm	750
Width	(W) mm	578
Height	(H) mm	531
Dry weight	Kg	80
Fuel tank capacity	l	6.1

Autonomy

Fuel consumption @ 75% PRP	l/h	2.15
Fuel consumption @ 100% PRP	l/h	2.86
Running time @ 75% PRP	h	2.84
Running time @ 100% PRP	h	2.13

Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69

GENSET CONTROL

COMMANDS:

- Selector switch: OFF - ON
- Starting systems: Recoil
- Fuel Cock

PROTECTIONS STANDARD:

- Thermal protection
- Oil Guard

SOCKET TYPE

SCHUKO 230V 16A IP54	1
2P+T CEE 230V 16A IP44	1
3P+N+T CEE 400V 16A IP44	1



ACCESSORIES

TRANSPORTATION KIT

- With fix handles



- With folding handles

